


FLEX-03M SERIES CIGS MODULE

ELECTRICAL PERFORMANCE AT STC¹

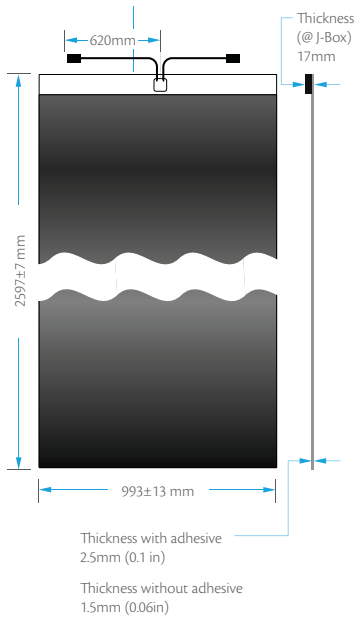

			FLEX-03 350M	FLEX-03 360M	FLEX-03 370M	FLEX-03 380M	FLEX-03 390M
Nominal Power	P_{MPP}	[W]	350	360	370	380	390
Aperture Efficiency	η	[%]	15.3%	15.7%	16.1%	16.6%	17.0%
Power Output Tolerance		[W]	+10/-0	+10/-0	+10/-0	+10/-0	+10/-0
Maximum Power Voltage	V_{MPP}	[V]	29.2	29.5	29.9	30.2	30.5
Maximum Power Current	I_{MPP}	[A]	12.0	12.2	12.4	12.6	12.8
Open Circuit Voltage	V_{OC}	[V]	36.9	37.1	37.3	37.5	37.7
Short Circuit Current	I_{SC}	[A]	14.1	14.1	14.1	14.1	14.1
Maximum Series Fuse Rating		[A]	25				
Maximum System Voltage (IEC/UL)		[V]	1000/1000				

¹Standard Test Conditions (STC): 1000 W/m², 25°C cell temperature, AM 1.5 spectrum

THERMAL CHARACTERISTICS

NOCT	[°C]	48
Temperature Coefficient of P_{MPP}	[%/°C]	-0.38
Temperature Coefficient of V_{OC}	[%/°C]	-0.28
Temperature Coefficient of I_{SC}	[%/°C]	0.008

PHYSICAL AND MECHANICAL SPECIFICATIONS

Length	2580 mm
Width	1000 mm
Thickness, Maximum at J-Box*, Module	17 mm , 2.5 mm
Weight (Module without adhesive)	5.1 kg
Weight (Module with adhesive)	6.2 kg
Weight/Area (Module without adhesive)	1.7 kg/m ²
Weight/Area (Module with adhesive)	2.0 kg/m ²
Junction Box Type	IP68
Cable Connections	Amphenol Technology Shenzhen (E346053)
Cell Type	Copper Indium Gallium Diselenide (CIGS)
Warranty**	5 year workmanship; 10/25 year power output
Certifications	UL 1703, IEC 61646, IEC 61730, UL Class A over TPO - slope up to 1", cUL 1703, IEC 62716, Australia CEC
Packaging Info	10 modules per crate, 40 modules per pallet, 320 modules per 20' ISO container, 640 modules per 40' ISO container

*2.5 mm (0.1 in) for the rest of the module with adhesive

**1.6 mm (0.06 in) for the rest of module without adhesive

**Please see full warranty for details